

# Primary Side Control SMPS with Integrated MOSFET

## General Description


GG6004 is a primary side control SMPS with an integrated MOSFET.

It features programmable cable drop compensation and a peak current compensation function, PFM technology, and a CV/CC control loop with high reliability and average efficiency.

With the GG6004, the opto-coupler and Y capacitor, secondary feedback control, and the loop compensation circuit can be eliminated to reduce cost.

Output power range of the GG6004 is 2~4W, and in this range, the output voltage can be set through a feedback resistor, and the output current also can be set through the peak current sense resistor.

Setting cable drop compensation and peak current compensation are also options for optimized output voltage/current regulation.

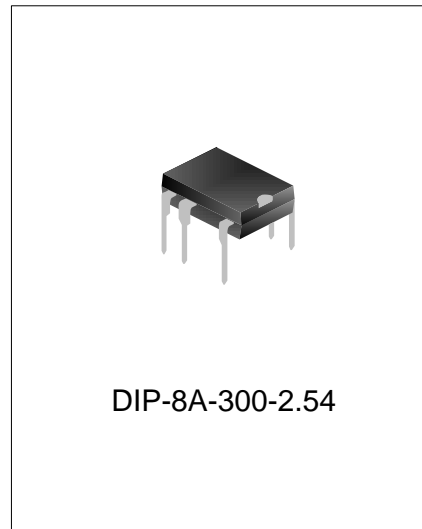

## Features


- Built-in high voltage MOSFET
- Primary side control
- Low start-up current
- Leading edge blanking
- Pulse-Frequency Modulation (PFM)
- Overvoltage protection
- Undervoltage lockout
- Over temperature protection
- Cycle by cycle current limiting
- Open loop protection
- Cable drop compensation
- Peak current compensation

## Applications


- Mobile Charger
- Low Power Adaptor
- Charger for MP3 and other portable apparatus
- Stand-by power supply



## Block Diagram

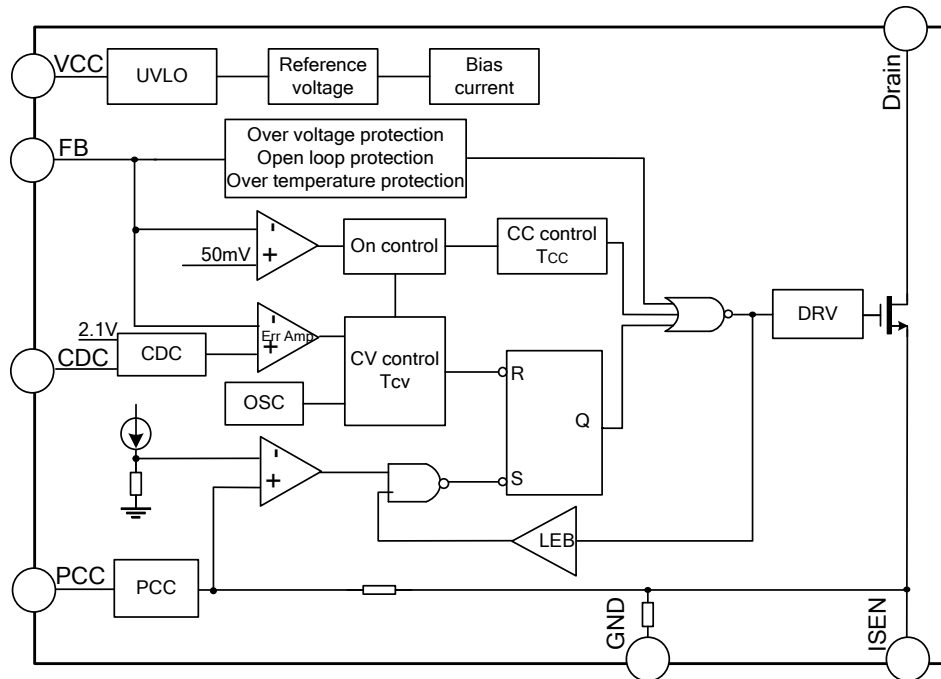

## Pin Configuration



## Pin Description

| Pin No | Pin Name | I/O | Function description                           |
|--------|----------|-----|--|
| 1      | ISEN     | I   | Peak current sense pin                         |
| 2      | GND      | -   | Ground   |
| 3      | VCC      | -   | Power supply                                   |
| 4      | FB       | I   | Feedback voltage input pin                     |
| 5      | CDC      | I   | Cable drop compensation resistor connect pin   |
| 6      | PCC      | I   | peak current compensation resistor connect pin |
| 7      | --       | --  | No pin   |
| 8      | Drain    | O   | Drain pin of high voltage MOSFET               |



**Absolute Maximum Rating** (unless otherwise specified,  $T_{amb}=25^{\circ}\text{C}$ )

| Characteristics                | Symbol      | Rating    | Unit               |
|--------------------------------|-------------|-----------|--------------------|
| Supply voltage                 | $V_{CC}$    | -0.3~26   | V                  |
| Internal voltage reference     | $V_{REF5V}$ | -0.3~5.5  | V                  |
| FB Input voltage               | $V_{FB}$    | -30~30    | V                  |
| CDC Input voltage              | $V_{CDC}$   | -0.3~8    | V                  |
| PCC Input voltage              | $V_{PCC}$   | -0.3~8    | V                  |
| Input voltage on other pins    | $V_{IN}$    | -0.3~ 5.3 | V                  |
| Input current                  | $I_{IN}$    | -10~10    | mA                 |
| Drain-source breakdown voltage | $BV_{DSS}$  | 650       | V                  |
| Gate-Source Voltage            | $V_{GS}$    | $\pm 30$  | V                  |
| Drain Current                  | $I_D$       | 1         | A                  |
| Drain Current Pulsed           | $I_{DM}$    | 2.5       | A                  |
| Power Dissipation              | $P_D$       | 1.25      | W                  |
| Single Pulsed Avalanche Energy | $E_{AS}$    | 35        | mJ                 |
| Operating junction Temperature | $T_J$       | +160      | $^{\circ}\text{C}$ |
| Operating temperature range    | $T_{amb}$   | -20~85    | $^{\circ}\text{C}$ |
| Storage temperature range      | $T_{STG}$   | -40~125   | $^{\circ}\text{C}$ |
| ESD(body mode)                 | ESD         | 2500      | V                  |

**Thermal Characteristics**

| Characteristics                         | Symbol          | Conditions | Rating | Unit                 |
|---|-----------------|------------|--------|----------------------|
| Thermal Resistance, Junction-to-Case    | $R_{\theta JC}$ |            | 12     | $^{\circ}\text{C/W}$ |
| Thermal Resistance, Junction-to-Ambient | $R_{\theta JA}$ |            | 74     | $^{\circ}\text{C/W}$ |

**MOS Electrical Characteristics** (unless otherwise specified,  $T_{amb}=25^{\circ}\text{C}$ )

| Characteristics                         | Symbol       | Conditions                             | Min | Typ  | Max  | Unit     |
|---|--------------|--|-----|------|------|----------|
| Drain-source breakdown voltage          | $BV_{DSS}$   | $V_{GS}=0V, I_D=50\mu A$               | 650 | --   | --   | V        |
| Static Drain-source on-state resistance | $R_{DS(ON)}$ | $V_{GS}=10V, I_D=0.5A$                 | --  | 9.6  | 11.5 | $\Omega$ |
| Input Capacitance                       | $C_{ISS}$    | $V_{GS}=0V, V_{DS}=25V, f=1\text{MHz}$ | --  | 120  | --   | pF       |
| Output Capacitance                      | $C_{OSS}$    |  | --  | 19   | --   |          |
| Reverse Transfer Capacitance            | $C_{RSS}$    |  | --  | 0.55 | --   |          |
| Turn-on Delay Time                      | $t_{d(ON)}$  | $V_{DS}=0.5BV_{DSS}, I_D=25\text{mA}$  | --  | 5.8  | --   | nS       |
| Rise Time                               | $t_r$        |  | --  | 11   | --   |          |
| Turn-off Delay Time                     | $t_{d(OFF)}$ |  | --  | 8.0  | --   |          |
| Fall time                               | $t_f$        |  | --  | 14.8 | --   |          |



**Electrical Characteristics** (unless otherwise specified,  $V_{CC}=18V$ ,  $T_{amb}=25^{\circ}C$ )

| Characteristics                          | Symbol          | Conditions                  | Min  | Typ  | Max  | Unit        |
|--|-----------------|-----------------------------|------|------|------|-------------|
| <b>Supply Voltage</b>                    |                 |                             |      |      |      |             |
| Start-up current                         | $I_{ST}$        | $V_{CC}=14V$                | --   | 3    | 10   | $\mu A$     |
| Quiescent current                        | $I_{OP}$        |                             |      | 300  | 450  | $\mu A$     |
| Start threshold voltage                  | $V_{ST}$        |                             | 15   | 16   | 17   | V           |
| Shutdown threshold voltage               | $V_{SP}$        |                             | 7.0  | 8.0  | 9.0  | V           |
| Reference power supply                   | $V_{REF5V}$     |                             | 4.75 | 5.0  | 5.25 | V           |
| VCC Overvoltage protection               | $V_{CCOVP}$     |                             | 24   | 25   | 26   | V           |
| <b>Feedback</b>                          |                 |                             |      |      |      |             |
| Enable turn on voltage                   | $V_{EN}$        |                             | 20   | 50   | 80   | mV          |
| FB Over voltage protection               | $V_{FBOVP}$     |                             | 4.8  | 5.0  | 5.2  | V           |
| Loop open voltage                        | $V_{BLANK}$     |                             | -1.4 | -1.2 | -1.0 | V           |
| Constant voltage threshold value         | $V_{CV}$        |                             | 2.0  | 2.1  | 2.2  | V           |
| <b>Dynamic Characteristics</b>           |                 |                             |      |      |      |             |
| Leading-edge blanking time               | $T_{LEB}$       |                             | 0.3  | 0.6  | 0.9  | $\mu S$     |
| CV loop control off time                 | $T_{CVmin}$     |                             | 1.0  |      | 2.8  | $\mu S$     |
|  | $T_{CVmax}$     | $V_{FB} > V_{CV}+0.2V$      | 12   | 18   | 24   | mS          |
| Over voltage recover time                | $T_{OVP}$       |                             | 12   | 18   | 24   | mS          |
| <b>Current Limit</b>                     |                 |                             |      |      |      |             |
| Peak current detecting threshold voltage | $V_{PK}$        | $I_{PCC}=0$                 | 500  | 700  | 900  | mV          |
| Peak current compensation                | $\Delta I_{PK}$ | $I_{PCC}=-1\mu A$           | 2.2  | 2.5  | 2.8  | mA          |
| <b>Cable drop compensation</b>           |                 |                             |      |      |      |             |
| Cable drop compensation voltage          | $V_{CDC}$       | $R_{CDC}=100k$ , $D_S=50\%$ | 180  | 200  | 220  | mV          |
| <b>Over Temperature Protection</b>       |                 |                             |      |      |      |             |
| Over temperature detection               | $T_{sd}$        |                             | 125  | 140  | --   | $^{\circ}C$ |
| Over temperature hysteresis              | $T_{sdhys}$     |                             | 20   | 35   | 55   | $^{\circ}C$ |



## Functional Description


GG6004 is an off-line SMPS controller. It features a built-in MOSFET, cable drop compensation, and peak current compensation. CV/CC is obtained based on output voltage/current controlled through detecting the feedback voltage of the auxiliary winding and peak current of the primary winding.

The whole operating period consists of peak current detection and feedback voltage detection.

When the MOSFET is on, the primary current is detected by a sense resistor and the voltage at pin FB is negative, the load is powered by the output capacitor and the output voltage  $V_o$  decreases. When the primary current exceeds the limit, the MOSFET is off and the voltage at pin FB is detected. The output capacitor and the load are powered by a secondary current and  $V_o$  increases. The transistor is on again after stopping for TCV and holding for TCC and then it comes to peak current detect again.

## Start-up and under voltage lockout

At the beginning, the capacitor connected to pin  $V_{CC}$  is charged via the start resistor by the high voltage DC bus and the circuit starts to work if voltage at  $V_{CC}$  is 14.5V. The circuit is powered by the start resistor and the auxiliary winding for normal operation. The whole control circuit enters undervoltage lockout if  $V_{CC}$  is decreased to 6.5V, then the capacitor connected to pin  $V_{CC}$  is charged through the start resistor and the IC only restarts when  $V_{CC}=14.5V$ .

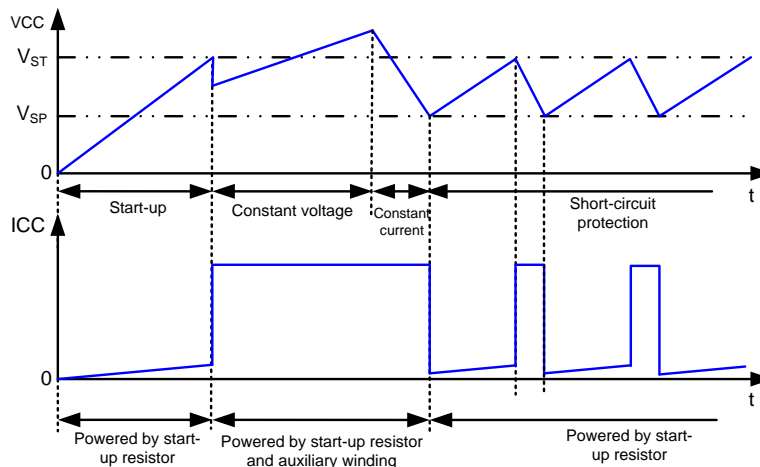

### 1. Peak current detection

When  $V_{DRIVE}=1$ , the MOSFET is on and the linearly increased primary current is detected by the sense resistor. When this current increases to the threshold value (peak value), the MOSFET is off and the driving voltage  $V_{DRIVE}=0$ .

There is a burr when the MOSFET is on, and the MOSFET will be off by error if its voltage is up to the threshold value  $V_{PK}$  for the peak current. So the leading edge blanking time  $T_{LEB}=0.6\mu s$  is set to avoid this error.


### 2. Peak current compensation

The detected peak current value will be increased following the input AC voltage due to the off delay. The output current is greatly affected by the peak current, therefore the voltage regulation is worse without peak current compensation.

Peak current compensation is available in the GG6004 through pin PCC by AC input voltage detection. With the compensation, the detected peak current is hold with different input AC voltages for better line regulation.

The threshold value  $V_{PK}=0.7V$  is set by the circuit, where this value can be adjusted by  $R_{SEN}$ . The peak current compensation ability is decided by  $R_{PCC}$ , the lower the resistance, the higher the compensation.



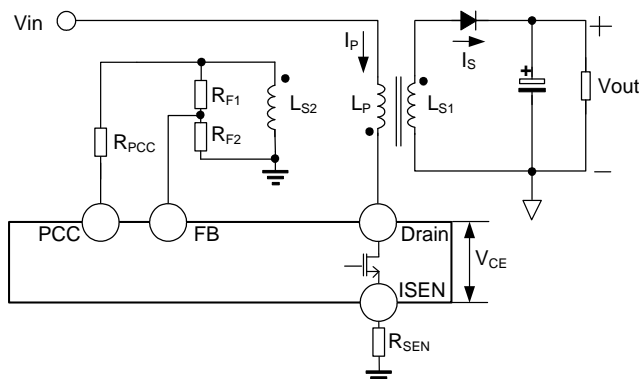

### 3. Feedback Voltage Detection

When the MOSFET is off, the voltage at pin FB is positive and voltage is sensed at 2/3 duration of this positive voltage, this sensed voltage is used for  $T_{CV}$  control after compared with  $V_{CV}$ , amplified, and held. CV is available by controlling  $T_{CV}$ . Without consideration of voltage drop on the cable and rectifier diode, the equation is shown as:

$$V_{OUT} \frac{n_{S2}}{n_{S1}} \cdot \frac{R_{F2}}{R_{F1} + R_{F2}} = V_{CV}$$

$T_{OFF1}$ ,  $T_{OFF2}$  and  $T_{ON}$  are counted at the same time which indicates durations of positive FB voltage, FB damping oscillation and FB negative voltage respectively. Positive FB voltage indicates there is current delivered to the secondary side of transformer, while negative and FB damping oscillation indicate there is no current delivered to the secondary side of transformer.

The duty factor is expressed as:

$$D_S = \frac{T_{OFF1}}{T_{OFF1} + T_{OFF2} + T_{ON}} = \frac{T_{OFF1}}{T};$$


Output current, also the average current in secondary winding:

$$I_{OUT} = \frac{I_{SP} \cdot T_{OFF1}}{2T} = \frac{nD_S}{2} I_{PK};$$

$I_{SP}$ —peak current in secondary winding,  $I_{PK}$ —peak current in primary winding,  $n$ —turns ratio of primary/secondary windings.

Hence, with constant peak current,  $T_{OFF1} = T_{OFF2} + T_{ON}$  is guaranteed for CC output.



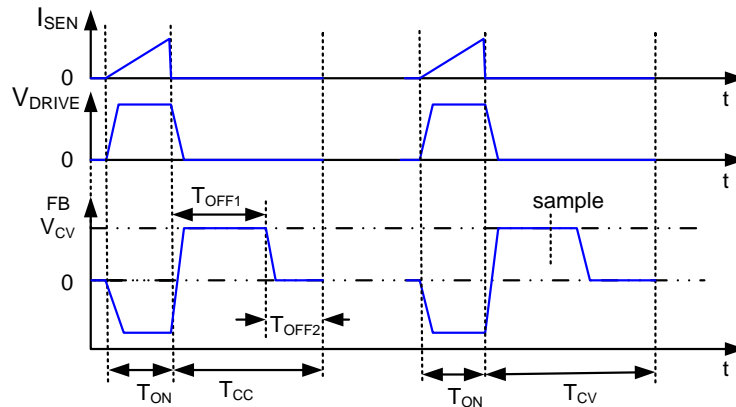


#### 4. Cable Drop Compensation

In the actual design, the cable voltage drop  $V_{CAB}$  should be taken into consideration:


$V_D$  is almost constant with different currents, and cable voltage drop  $V_{CAB}$  is proportional to output current, and  $V_{CV}$  is needed to be compensated to get better voltage regulation.

For cable compensation,  $R_{CDC}$  is used for equivalent cable resistor and different  $R_{CDC}$  is needed for different cable.

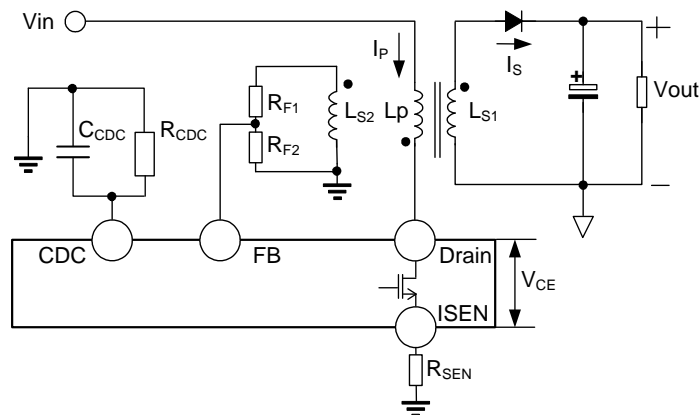

#### 5. Over voltage protection

The output is shutdown if voltage at FB exceeds the threshold  $V_{OVP}$  and if this state is kept for 18ms, then the circuit restarts.

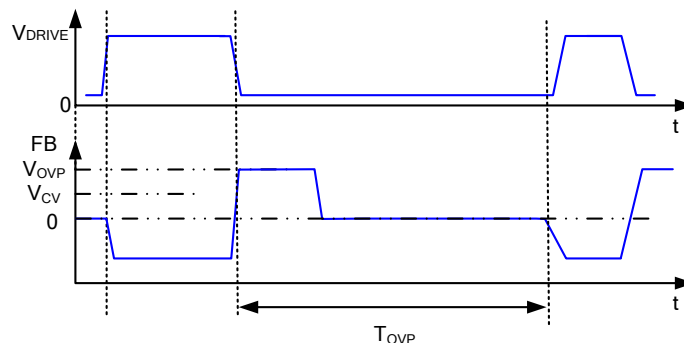




## 6. Over Temperature Protection

If the circuit is over temperature, the output is shut down to prevent the circuit from damage. The hysteresis of over temperature protection is used to avoid frequently change between normal and protection modes. The over protection threshold value is 140°C and hysteresis value is about 35°C. Hence, the circuit is only functions normally when the temperature is 105°C below.

## 7. Open Loop Protection

When the MOSFET is on, if  $V_{FB} > -1V$ , the loop is open and open loop protection is active to shutdown the output, this is kept for 18ms and then the circuit restarts.

## Typical Application Circuit

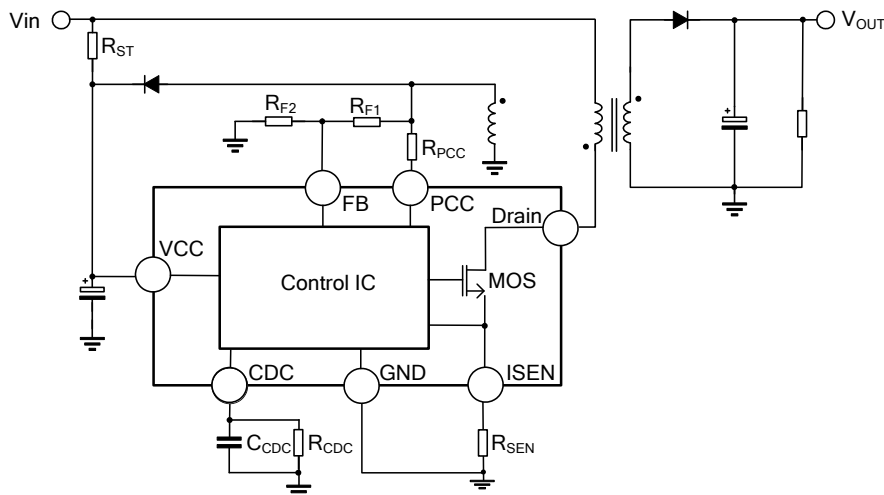


Note: The circuit and parameters are for reference only; please set the parameters of the real application circuit based on the actual testing.

## Ordering Information

| Part No | Package         | Marking | Material | Packing |
|---------|-----------------|---------|----------|---------|
| GG6004  | DIP-8A-300-2.54 | GG6004  | Pb free  | Tube    |
| GG6004G | DIP-8A-300-2.54 | GG6004G | Pb free  | Tube    |



## Package Outline

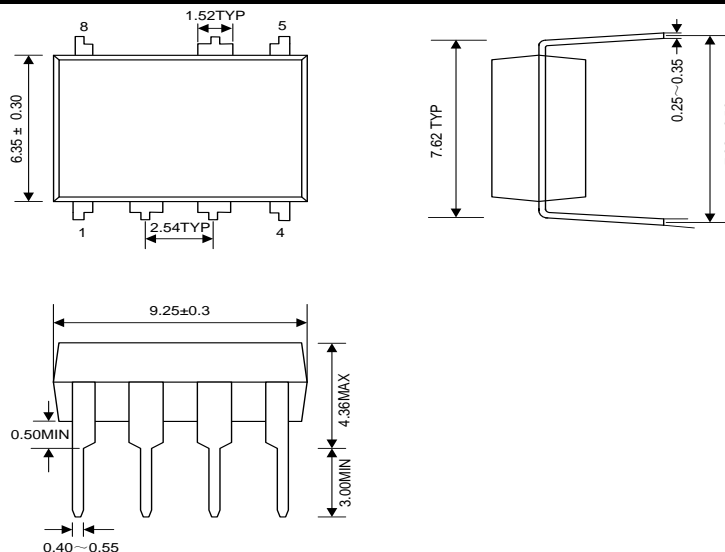**DIP-8A-300-2.54**
**UNIT: mm**


## MOS Devices Operation Notes:

Electrostatic charges may exist in many things. Please take the following preventive measures to prevent effectively the MOS electric circuit as a result of the damage which is caused by discharge:

- The operator must put on wrist strap which should be earthed to against electrostatic.
- Equipment cases should be grounded.
- All tools used during assembly, including soldering tools and solder baths, must be grounded.
- MOS devices should be packed in antistatic/conductive containers for transportation.

## Disclaimer:

The information furnished in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Golden Gate Integrated Circuits (GGIC) for its use. GGIC reserves the right to change circuitry and specifications at any time without notification to the customer.

- Golden Gate Integrated Circuits reserves the right to make changes to the information herein for the improvement of the design and performance without further notice! Customers should obtain the latest relevant information before placing orders and should verify that such information is complete and current.
- All semiconductor products malfunction or fail with some probability under special conditions. When using Golden Gate Integrated Circuits products in system design or complete machine manufacturing, it is the responsibility of the buyer to comply with the safety standards strictly and take essential measures to avoid situations in which a malfunction or failure of such Golden Gate Integrated Circuits products could cause loss of body injury or damage to property.
- Golden Gate Integrated Circuits (GGIC) Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of GGIC Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify GGIC for any damages resulting from such use or sale.