


Buck/Boost/Buck-Boost LED Driver with 8-60V Input

General Description

The GGD42567 is a buck/boost/buck-boost LED driver with external power MOSFET. It provides thermal shutdown circuit, current limit circuit, and over voltage circuit. And good line regulation and load regulation are available with wide voltage input. The GGD42567 adopts current mode control which provides fast transient response, excellent constant current characteristics, and simple loop stabilization design. It has high efficiency: 96% for buck mode, 83% for buck-boost mode and 95% for boost mode

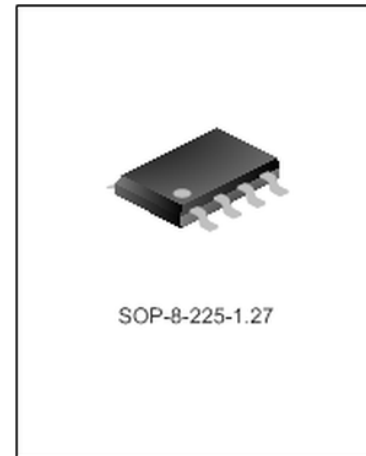

Features

- 8-60V input voltage range;
- External MOSFET
- 300kHz fixed frequency;
- Over temperature protection;
- LED open circuit protection
- Over voltage protection;
- Cycle-by-cycle over current protection.

Applications

- LED building illumination
- LED street lamp

Ordering Information

Part No.	Package	Marking	Material	Packing
GGD42567	SOP-8-225-1.27	GGD42567	Pb free	Tube
GGD42567TR	SOP-8-225-1.27	GGD42567	Pb free	Tape&Reel


Absolute Maximum Ratings

Characteristics	Symbol	Ratings	Unit
Supply Voltage	V_{IN}	60	V
VDD Voltage	V_{DD}	10	V
GATE Voltage	V_{GATE}	-0.3~9	V
SENSE+ Voltage	V_{S+}	-0.3~60	V
SENSE- Voltage	V_{S-}	-0.3~60	V
COMP Voltage	V_{COMP}	-0.3~6	V
CS Voltage	V_{CS}	-0.3~6	V
Junction Temperature	T_j	150	°C
Lead Temperature	T_L	260	°C
Input voltage range	V_{IN}	7~60	V
Operating Temperature Range	T_{OPR}	-40~125	°C
Storage Temperature Range	T_{STG}	-65~150	°C

Electrical Characteristics (Unless otherwise specified, $V_{IN}=24V$, $I_{OUT}=700mA$, $T_{amb}=25^{\circ}C$)

Characteristics	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Supply Voltage	V_{IN}		7	--	60	V
Operating Current	I_{IN}	$V_{CC}=8/60V$, $V_{PWM}=5V$	--	1.5	2.0	mA
Current Limit	I_{LIM}	$R_{CS}=0.05$	3.5	4	5	A
Maximum Duty Cycle	D_{max}	4LED, $V_{IN}=11V$	--	93	95	%
Oscillator Frequency	f_{osc}		250	280	320	kHz
COMP Clamp Voltage	V_{COMP}		2.7	2.8	2.9	V
VDD Voltage	V_{DD}	No load	9	10	11	V
Sense voltage threshold value	V_{CS}	V_{CS} average value	--	100	--	mV
Over temperature protection threshold value	T_{SD}		--	160	--	$^{\circ}C$
Over temperature protection hysteresis	T_{SD-hys}		--	30	--	$^{\circ}C$

Pin Configuration

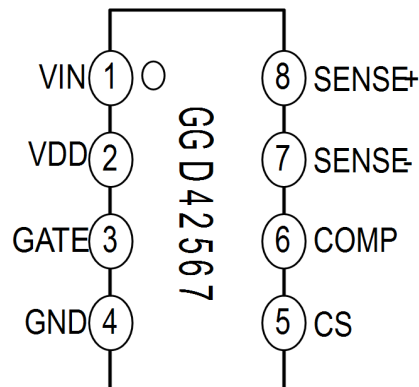

Pin Description

Pin No.	Pin Name	I/O	Description
1	VIN	I	Voltage input.
2	VDD	I/O	Power supply
3	GATE	O	Gate drive.
4	GND	I/O	Ground.
5	CS	I	Current sense pin.
6	COMP	I/O	Compensation pin
7	SENSE-	I	Current sense- pin.
8	SENSE+	I	Current sense+ pin.

Function Description

The GGD42567 is a current mode LED driver. Output average current is available through detecting R_s current. The Gm amplifier compares the output average current with the threshold current (threshold current is set by internal) to dynamically adjust the current. When the output current is higher than threshold current, the COMP pin's voltage is lower down. Since the COMP pin's voltage is proportional to the peak inductor current, output current decreases. When the output current is lower than threshold current, the COMP pin's voltage is up and the output current increases. The output current is stable at the set value by adjusting the circuit loop.

1. Output current setting

The output current is determined by the sense resistor and setting voltage. The sense voltage (Drop voltage on R_{CS} , V_{SENSE+} - V_{SENSE-}) is 100mV, and adjust the output current by adjusting the sense resistor R_s (refer to Typical Application Circuit).

$$I_{OUT} = \frac{V_{SENSE+} - V_{SENSE-}}{R_s}$$

2. Current limiting

GGD42567 is current mode IC with internal cycle-by-cycle current limiting function. The current limit value is determined by R_{CS} . And the current limiting occurs when voltage on CS is higher than 0.2V.

$$I_{LIMIT} = \frac{0.2}{R_{CS}}$$

3. Frequency jitter

GGD42567 has internal frequency jitter function to improve the EMI performance of the system. The internal frequency is hopping in a very small range to reduce the single frequency radiation which simplifies the EMI design.

4. Over temperature protection


When the temperature is 160°C above, this protection works and comp voltage is pulled down, MOS is turned off. And all these are recovered when temperature falls below 130°C.

5. Output over voltage protection


When in boost/buck-boost modes, voltage drop on R_s is decreased to zero when LED is open, but IC is working. Output voltage will increase continuously if there is no protection and the MOSFET or other components will be damaged. MOSFET is off and IC stops if SENSE+ voltage is higher than the threshold value (60V) to guarantee the safety.

Typical Application Circuits


1. BUCK mode

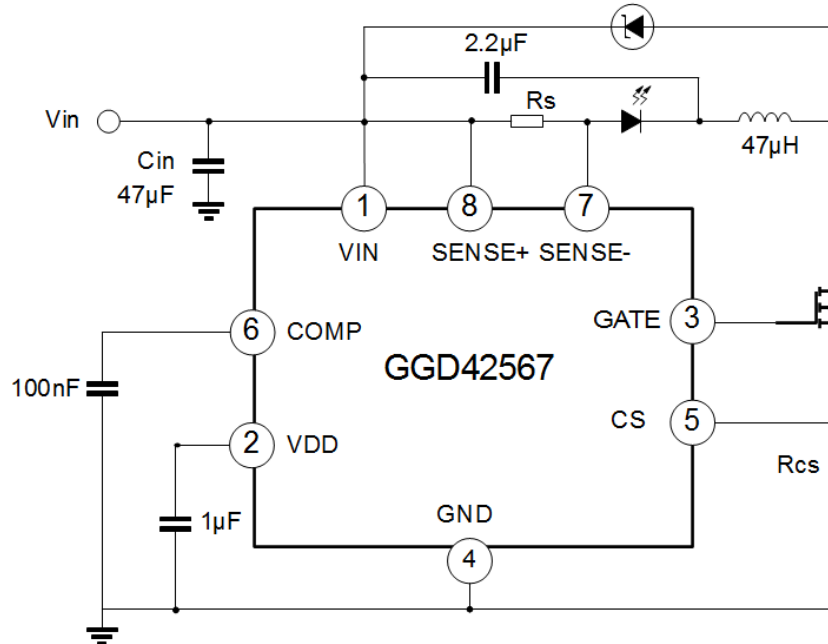


2. BOOST mode

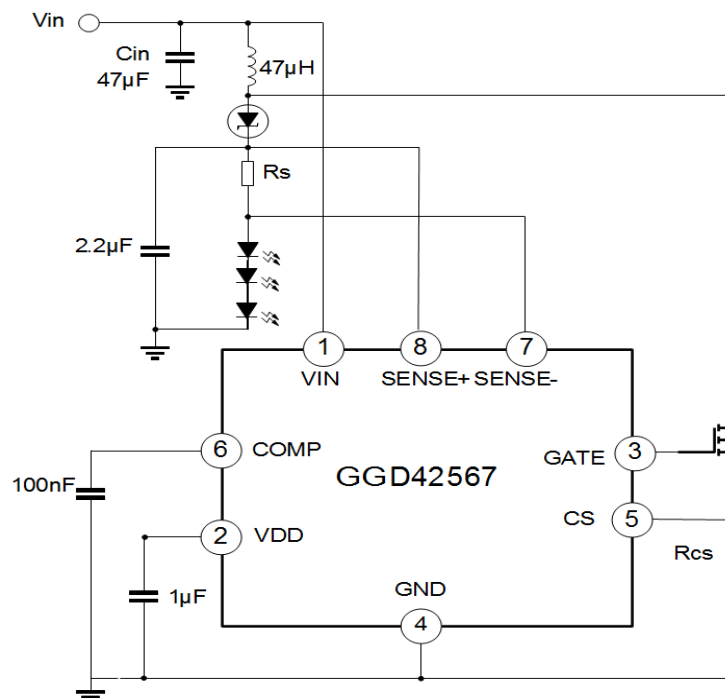

3. BUCK-BOOST mode

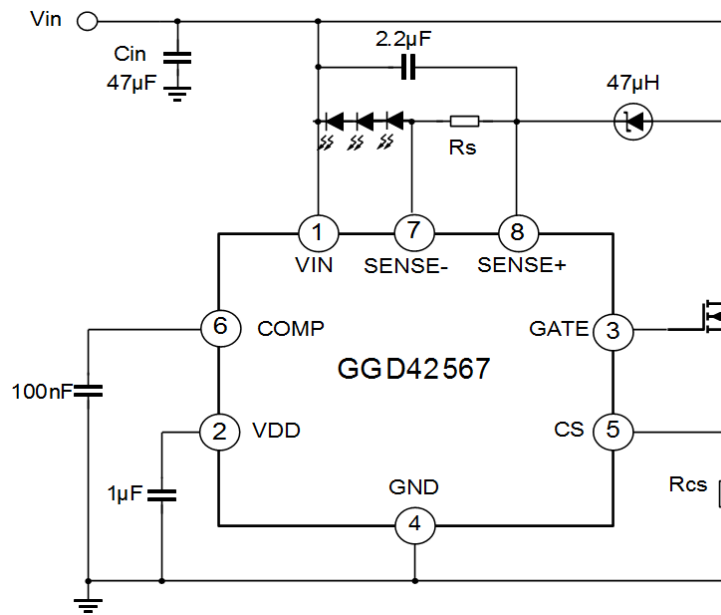

Package Outline

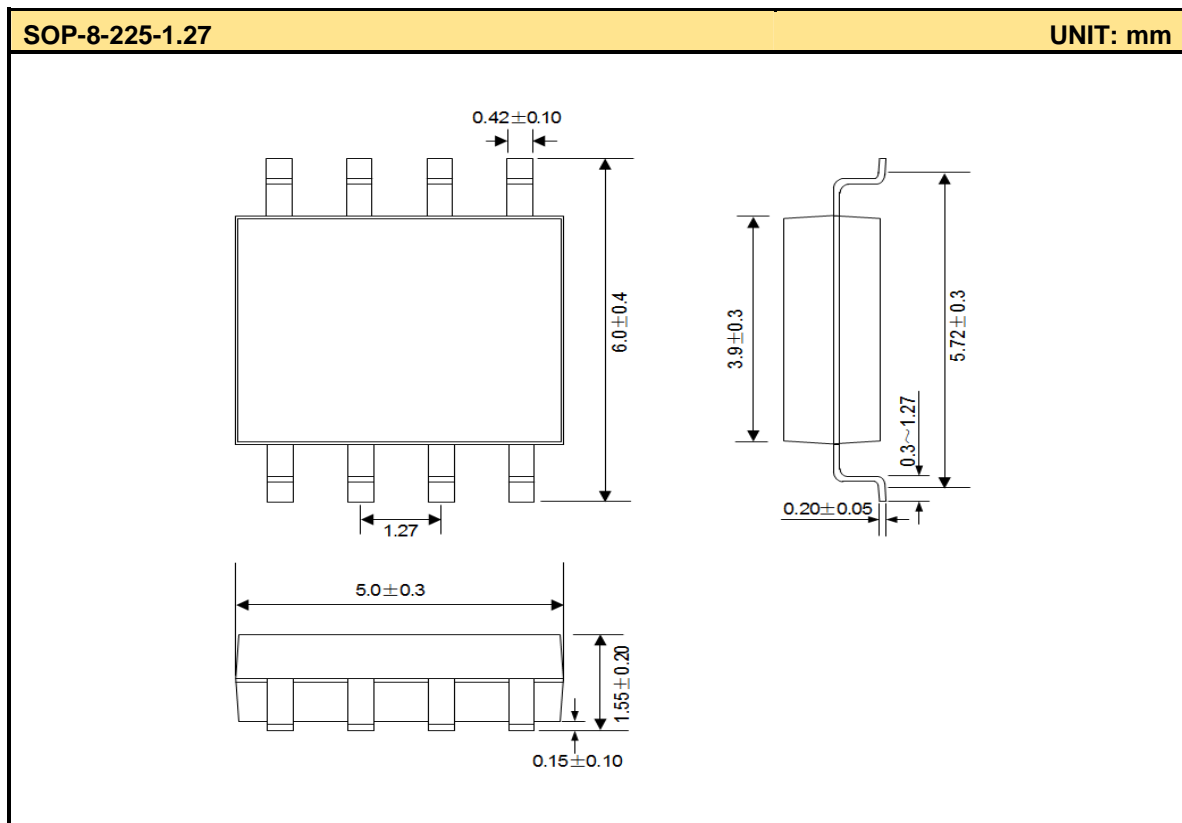



MOS DEVICES OPERATE NOTES:

Electrostatic charges may exist in many things. Please take following preventive measures to prevent effectively the MOS electric circuit as a result of the damage which is caused by discharge:

- The operator must put on wrist strap which should be earthed to against electrostatic.
- Equipment cases should be earthed. •
- All tools used during assembly, including soldering tools and solder baths, must be earthed.
- MOS devices should be packed in antistatic/conductive containers for transportation.

Disclaimer:

The information furnished in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Golden Gate Integrated Circuits (GGIC) for its use. GGIC reserves the right to change circuitry and specifications at any time without notification to the customer.

- Golden Gate Integrated Circuits reserves the right to make changes to the information herein for the improvement of the design and performance without further notice! Customers should obtain the latest relevant information before placing orders and should verify that such information is complete and current.
- All semiconductor products malfunction or fail with some probability under special conditions. When using Golden Gate Integrated Circuits products in system design or complete machine manufacturing, it is the responsibility of the buyer to comply with the safety standards strictly and take essential measures to avoid situations in which a malfunction or failure of such Golden Gate Integrated Circuits products could cause loss of body injury or damage to property.
- Golden Gate Integrated Circuits (GGIC) Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of GGIC Products for use in life support appliances, devices, or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify GGIC for any damages resulting from such use or sale.